



## ELECTRIC VEHICLE HOME CHARGER

Electric Vehicles (EV) and Plug-In Hybrid Electric Vehicles (PHEV) are the cars of the future. Along with their growth comes the requirement for the charging infrastructure to support them. For this, GARO EV charging systems are the ideal choice.



FLEXIBLE OUTPUT OPTIONS



EASY INSTALLATION



COMMUNICATION CAPABLE



SUITS ALL EVs



CONNECTIVITY & PAYMENT  
OPTIONS AVAILABLE


Whether you own or are looking to purchase an EV or PHEV, the GARO Home Charger is ideal for your home or office, providing a charge time that is up to three times faster than charging through an ordinary 10A household socket.

GARO are a world leading Swedish manufacturer of EV charging systems with market share in Sweden and throughout Europe. You can't go wrong with the reliable Swedish design and quality.



SPB Melbourne Office: 2/9 Compark Circuit Mulgrave, Victoria, 3170, Australia  
SPB National Head Office: 1 Ant Road, Yatala, Brisbane, QLD 4207, Australia  
T +61 (0) 7 3386 1102 F +61 (0) 7 3102 9913  
E info@spb.net.au W spb.net.au

## Dimensions

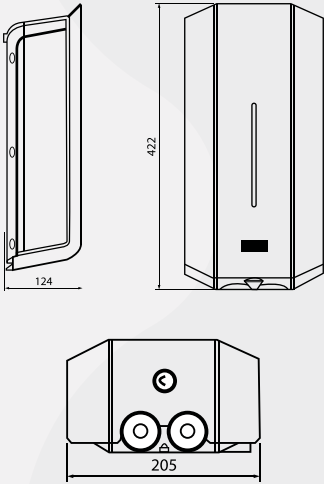

## Home Chargers

The GARO Home Charger has been developed in order to facilitate safe and efficient charging of electric vehicles in the home or in workplace car parks.

## Applications

- Ideal for home or holiday house
- Great for office / work parking for your employees
- Workshops / garages
- Dealerships and service locations
- Apartment car parks
- Commercial or hire car fleets

## Features & Benefits

- Great design – compact and stylish when wall mounted
- Easy to install – cut-out template included, makes wall mounting simple
- Flexible options – available in single or three phase
- Fast charging options – 3.7kW (1ph) to 22kW (3ph)
- Suits all EV types – Type 1 (J1772) or Type 2 (IEC62196) connections available
- 4 Colour LED – fast and easy status indication
- Optional power meter - for measuring your energy usage
- Secure – key lockable for access control
- Safe – built in RCBO protection

Technical Data	Single Phase		Three Phase
Series	GHL-xx37yy	GHL-xx74yy	GHL-xx22yy
<b>Nominal Input</b>			
Phases	1ph + Neutral + PE		3ph + Neutral + PE
Voltage	230 VAC +/- 10%		400 VAC +/- 10%
Frequency	50Hz		50Hz
Input Current	16A	32A	32A
Input Power	3.7kVA	7.4kVA	22kVA
<b>Nominal Power</b>			
Voltage	230 VAC +/- 10%		400 VAC +/- 10%
Current	16A	32A	32A
Nominal Power	3.7kVA	7.4kVA	22kVA
Over Current	16A	32A	32A
RCD	30mA (Type A)		30mA (Type B*)
<b>General Specification</b>			
Standards	IEC61851-1, IEC61851 - 22, IEC TS 61439 - 7		
Charging	Mode 3		
Weight	With socket: 3kg 3.8kg - 4.1kg with cable and connectors		5.4kg with cable and connectors
Plug or Socket (xx / yy) T1 / FC T2 / FC T2 / WO	J1772 (Type 1) plug + 5m cable IEC 62196 (Type 2) plug + 5m cable IEC 62196 (Type 2) socket		
Mounting	Wall mount		
Dimensions (HxWxD)	422mm x 205mm x 124mm		
Protection	IP44		
Operating Temp	-25C - +40C		
<b>Options</b>			
MID meter			
WiFi			
Charge and Drive connectivity and payment back end			
Load balancing			
GLK1 T23A 230V	EV cable Type 1 to Type 2 32A / 230V		
GHL Single Mount	Single mounting stand		
GHL Twin Mount	Twin mounting stand		

\*Optional